



 Interdeco™

Art Intervention

Draft Point Central Point Creative Spark



Art Intervention is an interaction with a previously existing artwork or space with the intent of changing the message to the audience. Central Point and Draft Point use random vertical lines in increasingly dense ratios to create movement across the floor, while Creative Spark “intervenes” with that movement, allowing a place for the eye to rest. The color palette is full of rich, vibrant color, grounded by sophisticated neutrals. We created this collection to give designers a tool to change the dynamics of a space in a meaningful, positive way.




Draft Point 959 Pewter, Central Point 939 Platinum, Creative Spark 989 Carbon (Brick Ashlar Installation)
Cover: Draft Point 959 Pewter (Brick Ashlar Installation)



 Interdeco™

Central Point 569 Lapis (Brick Ashlar Installation)

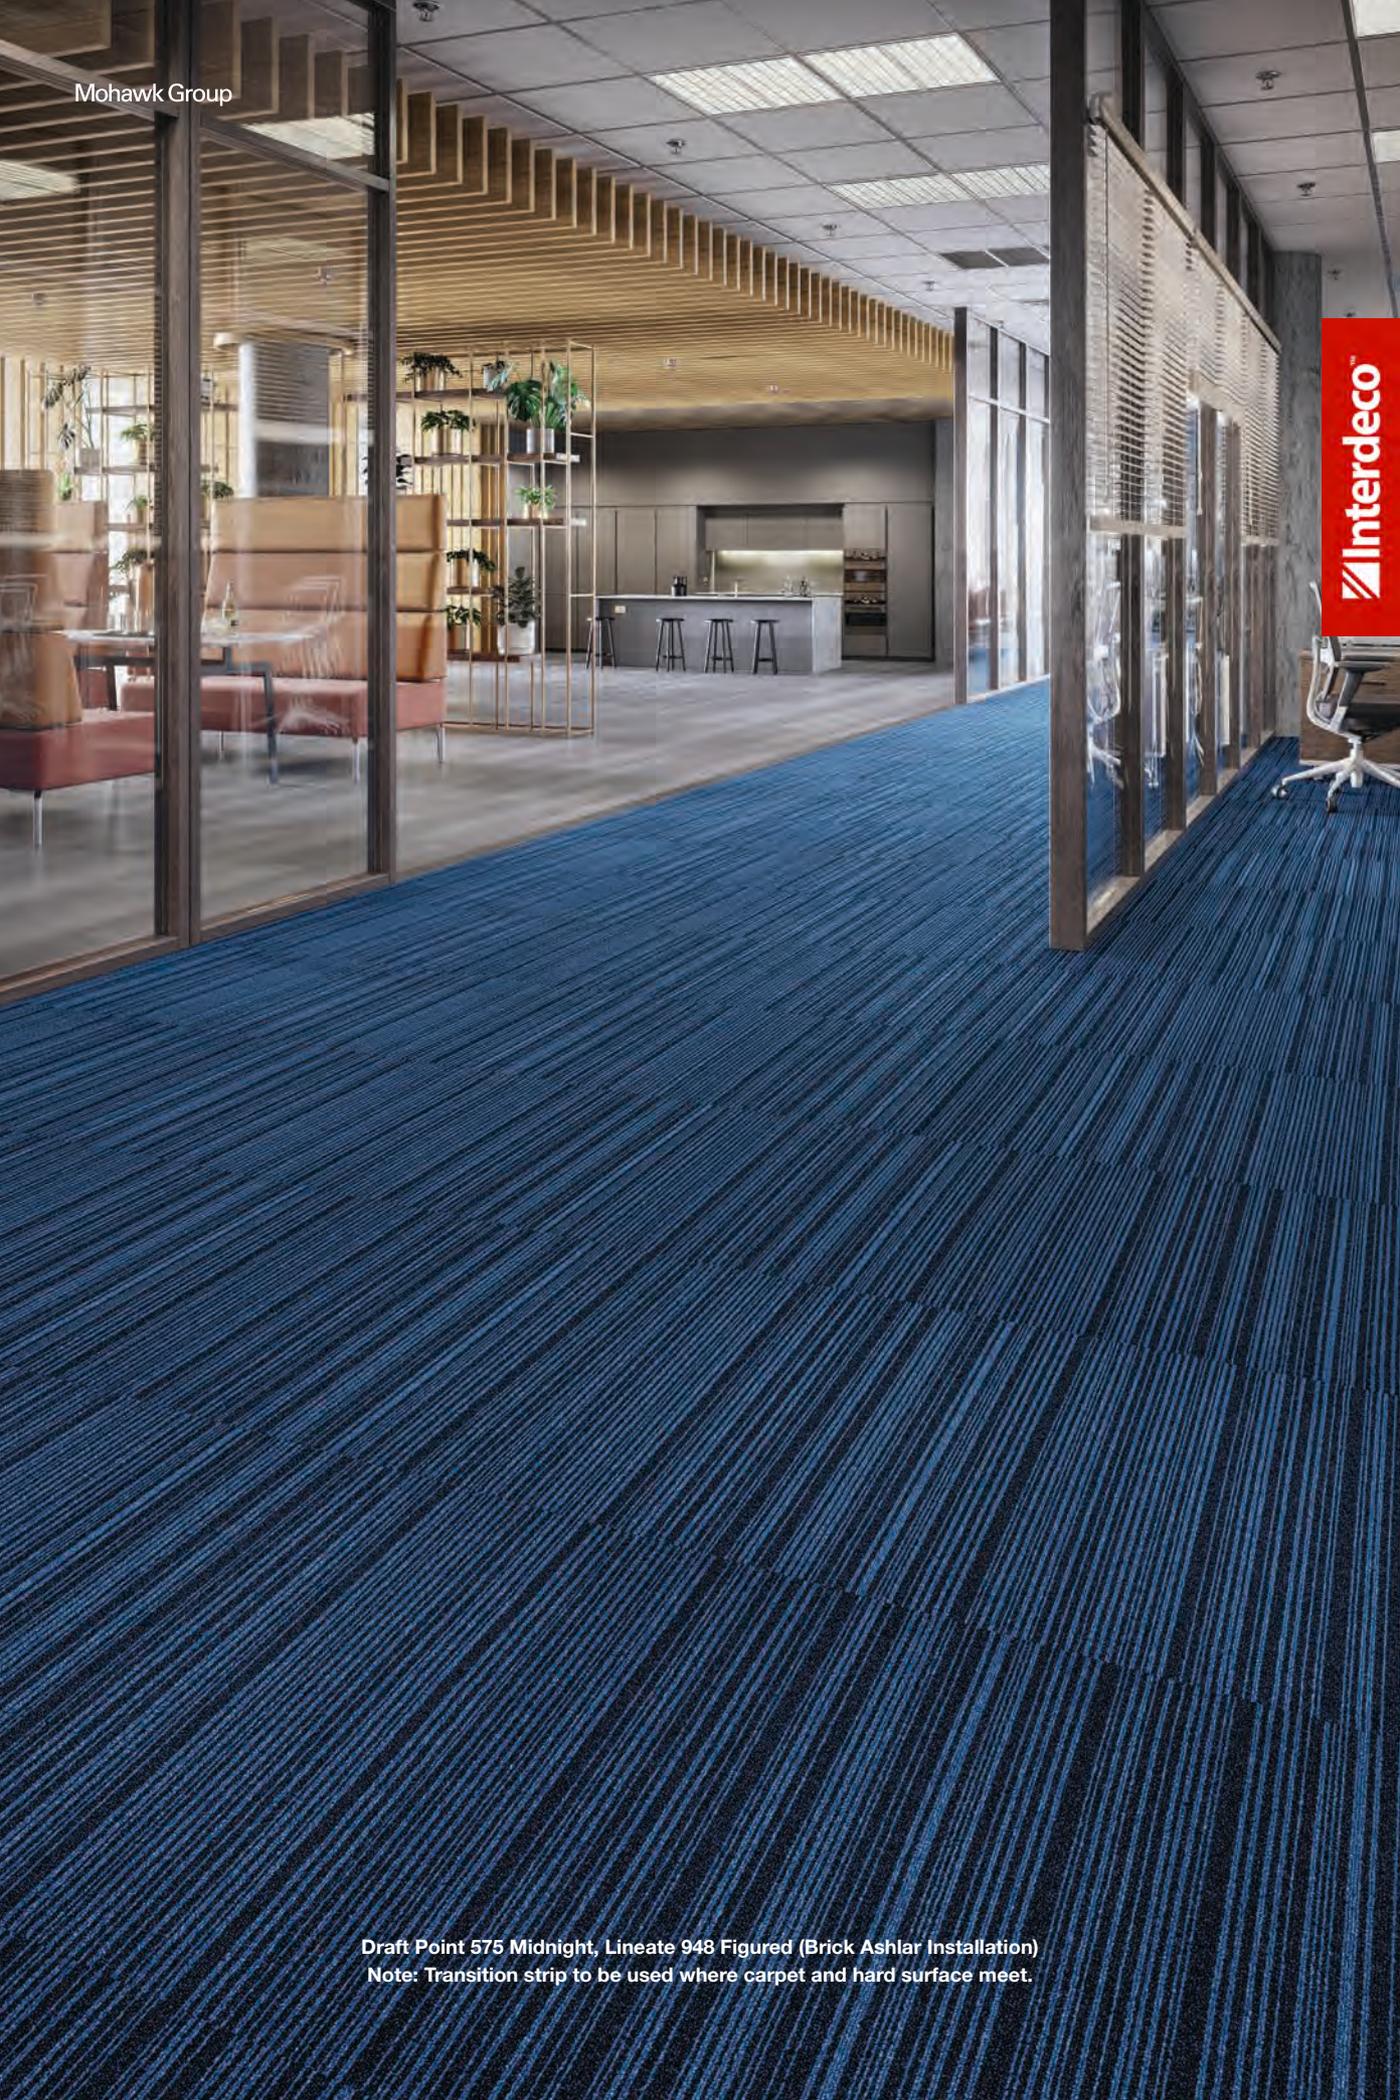

Draft Point 575 Midnight, Lineate 948 Figured (Brick Ashlar Installation)
Note: Transition strip to be used where carpet and hard surface meet.



Technology & Features

HEATHERED HUES CARPET FIBER

Art Intervention's aesthetic is created with Heathered Hues, Mohawk Group's new high performance color yarn system available in both Duracolor and Colorstrand technologies. This highly sustainable, solution dyed fiber creates high styling and vivid color for all market segments, projects and budgets. Heathered Hues fiber is textured and blended in a desirable palette of warm and cool neutrals with vibrant color accents. Heathered yarns provide visual texture and dimension when tufted, allowing for a variegated wool-like appearance for warmth and sophistication. Designed to do more with less, the yarn is dematerialized for a low environmental impact, and no water is used in production.

COLORSTRAND FIBER

For over 15 years, Colorstrand fiber has continually exceeded the demanding expectations of our customers for their projects. With the design flexibility and color intensity of solution dyed fiber, Colorstrand delivers lasting beauty and value. And, Colorstrand has the added benefit of third party SCS Global Services certified 30% recycled content.

ECOFLEX™ MATRIX CARPET TILE BACKING

Mohawk Group continues its dedication to sustainable solutions with EcoFlex™ Matrix, the next generation in carpet tile backing. Using advanced materials and patent pending engineering, EcoFlex Matrix lowers environmental impact without sacrificing performance. EcoFlex Matrix simplifies floor preparation and installation, greatly reduces sub-floor moisture concerns, and is easier to ship and handle.

For full details visit the technical resources section at mohawkgroup.com



Specifications

Draft Point
Central Point
Creative Spark

DESIGN

Size	24" x 24" (.6096m x .6096m)
Surface Appearance	Level Patterned Loop
Fiber Type	Colorstrand® SD Nylon
Dye Method	Solution Dyed
Installation Methods	Quarter Turn / Brick Ashlar
Colors Available	
Draft Point	10
Central Point	8
Creative Spark	2

PERFORMANCE

Construction	Tufted
Gauge	1/10" (39.37 rows per 10cm)
Stain Release Technology	EcoSentry Plus Stain Protection
Soil Release Technology	EcoSentry Soil Protection
Backing Material	EcoFlex™ Matrix
Flammability	ASTM E 648 - Class 1 (Glue Down)
Smoke Density	ASTM E 662 - Less than 450
Static Propensity	AATCC - 134 Under 3.5 KV


SUSTAINABILITY

Certification	Declare Red List Free
Indoor Air Quality	Green Label Plus #1171
NSF 140	Gold

SERVICE

Warranties	Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static
------------	--

Installation Instructions:



Mohawk Group warrants its adhesives for the life of the original installation only when a Mohawk Group style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Group adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce soiling.

Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

For current and complete specifications please visit www.mohawkgroup.com



877-3RE-CYCL

Produced with recycled materials

Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
1-800-554-6637
mohawkgroup.com

QSCDC PHOTO BROCHR LT



Draft Point

Collection	Art Intervention
Style Name	Draft Point
Style Number	BT427
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Quarter Turn, Brick Ashlar


Feature	Description
Backing Material	EcoFlex Matrix
Fiber Type	ColorStrand® SD Nylon
Dye Method	Solution Dyed
Installation Methods	Quarter Turn, Brick Ashlar
Stitches per Inch	12.2 (48.03 per 10cm)
Density	5333
Tufted Pile Weight	16.00 oz/yd ² (543 g/m ²)
Surface Texture	Level Patterned Loop



Recommended Installation Methods



Brick Ashlar



Quarter Turn

Colorways



Atomic

Color code: 362
Style number: BT427



Eminence

Color code: 464
Style number: BT427



Midnight

Color code: 575
Style number: BT427



Chartreuse

Color code: 651
Style number: BT427



Lodén

Color code: 676
Style number: BT427



Sand

Color code: 847
Style number: BT427



Desert

Color code: 878
Style number: BT427



Pewter

Color code: 959
Style number: BT427



Iron

Color code: 979
Style number: BT427



Jet

Color code: 989
Style number: BT427

Performance

Feature	Description
Gauge	1/10 (39.37 rows per 10 cm)
Foot Traffic Recommendation TARR	Heavy
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection

Sustainability

Feature	Description
Embodied Carbon	1.1
Beyond Carbon Neutral	-0.055
Pre-Consumer Recycled Content	0.53
Total Recycled Content	53
NSF 140	EcoFlex Matrix - NSF 140 Gold
Indoor Air Quality	GLP 1171
TVOC Range	0.5 mg/m3 or less
Red List Free	True
Declare Label	Nylon Modular Carpet on EcoFlex Matrix
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	ReCover Program
Health Product Declaration	HPD 2.1 EcoFlex Matrix - 1000 ppm
Environmental Claims Validation	EPD EcoFlex Matrix
LEED Credit Potential	LEED Eligible



Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static

Central Point

Collection	Art Intervention
Style Name	Central Point
Style Number	BT428
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Quarter Turn, Brick Ashlar




Feature	Description
Backing Material	EcoFlex Matrix
Fiber Type	ColorStrand® SD Nylon
Dye Method	Solution Dyed
Installation Methods	Quarter Turn, Brick Ashlar
Stitches per Inch	12.2 (48.03 per 10cm)
Density	5647
Tufted Pile Weight	16.00 oz/yd2 (543 g/m2)
Surface Texture	Level Patterned Loop

Recommended Installation Methods



Brick Ashlar



Quarter Turn

Colorways



Sunglow

Color code: 149
Style number: BT428



Flame

Color code: 259
Style number: BT428



Electric

Color code: 263
Style number: BT428



Amethyst

Color code: 439
Style number: BT428



Lapis

Color code: 569
Style number: BT428



Mint

Color code: 659
Style number: BT428



Sisal

Color code: 839
Style number: BT428



Platinum

Color code: 939
Style number: BT428

Performance

Feature	Description
Gauge	1/10 (39.37 rows per 10 cm)
Foot Traffic Recommendation TARR	Heavy
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection



Sustainability

Feature	Description
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO2e/ft2
Embodied Carbon	1.1 kg CO2e/ft2
Total Recycled Content	53%
Pre-Consumer Recycled Content	53%
NSF 140	EcoFlex Matrix - NSF 140 Gold
Indoor Air Quality	GLP 1171
TVOC Range	0.5 mg/m3 or less
Red List Free	True
Declare Label	Nylon Modular Carpet on EcoFlex Matrix
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	ReCover Program
Health Product Declaration	HPD 2.1 EcoFlex Matrix - 1000 ppm
Environmental Claims Validation	EPD EcoFlex Matrix
LEED Credit Potential	LEED Eligible

Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static

Creative Spark

Collection	Art Intervention
Style Name	Creative Spark
Style Number	BT426
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Quarter Turn, Monolithic, Brick Ashlar, Ve

Feature	Description
Backing Material	EcoFlex Matrix
Fiber Type	ColorStrand® SD Nylon
Dye Method	Solution Dyed
Installation Methods	Quarter Turn, Monolithic, Brick Ashlar, Ve
Stitches per Inch	12 (47.24 per 10cm)
Density	5189
Tufted Pile Weight	16.00 oz/yd2 (543 g/m2)
Surface Texture	Level Patterned Loop




Recommended Installation Methods




Brick Ashlar




Monolithic



Multi-Directional



Quarter Turn



Vertical Ashlar

Colorways



Carbon

Color code: 989
Style number: BT426

Performance

Feature	Description
Gauge	1/10 (39.37 rows per 10 cm)
Foot Traffic Recommendation TARR	Heavy
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection

Sustainability

Feature	Description
Embodied Carbon	1.06
Beyond Carbon Neutral	-0.053
Pre-Consumer Recycled Content	0.53
Total Recycled Content	53
NSF 140	EcoFlex Matrix - NSF 140 Gold
Indoor Air Quality	GLP 1171
TVOC Range	0.5 mg/m3 or less
Red List Free	True
Declare Label	Nylon Modular Carpet on EcoFlex Matrix
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	ReCover Program
Health Product Declaration	HPD 2.1 EcoFlex Matrix - 1000 ppm
Environmental Claims Validation	EPD EcoFlex Matrix
LEED Credit Potential	LEED Eligible

Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, 10 Year Limited Static