



Interdeco™

Hot & Heavy

Secoya Bolder



Bold, contemporary aesthetics of hardwood and polished concrete gain new versatility in the Hot & Heavy Collection of loose-lay enhanced resilient tile. The oversize format of both styles provides striking visual impact as well as rapid installation in large, open-concept spaces.

Interdeco™

Secoya Bolder

Secoya explores warm and cool tones of richly grained hardwood visuals in a substantial 9"x59" plank. Bolder grounds spaces with deep taupes and grays in a polished concrete visual and hefty 36"x36" tile.











Bolder 832 River Rock, 888 Schist, Intercosmic 868 Stellar

Earth To Sky

Inspired by aerial photography of raw, natural environments, the Earth to Sky carpet tile collection enables you to create subtle landscapes of tonal and textural shifts. Impressionist patterns in 24"x24" and 12"x36" tiles explore chromatic palettes highlighted with lustrous metallic yarns. The biophilic design of Earth to Sky brings the depths of the earth and farthest reaches of the atmosphere to your inspired spaces.



Metagalactic

Available as 12"x36" tiles, Metagalactic features a metallic accent recalling mineral deposits in natural earthworks.



Living World

Mimicking natural landscapes, Living World is available as a 24"x24" tile.



Intercosmic

Adapted from the marble patterns that occur in many stones, Intercosmic is available in a 24"x24" tile.

FEATURES

- 9 colorways using metallic yarn accents for increased color depth and dimension
- Duracolor® Premium Nylon
- Backed with EcoFlex NXT
- Installs with FlexLok™ Tabs
- NSF/ANSI 140 Gold
- Declared Red List Free
- Minimum 38% Recycled Content



Intercosmic 859 Ethereal



Secoya Colorways



123 Benmore



142 Kew Gardens



148 Atwell Mill



152 Arrowhead Creek



833 Oakbark



872 Picton Park



878 Woodland



936 Converse Basin



946 Open Canyon



989 Calaveras

Bolder Colorways



832 River Rock



888 Schist



925 Pebble



999 Onyx





Secoya & Bolder

LOOSE LAY ERT

PERFORMANCE

- Mottled concrete and hardwood visuals create stunning and unique installations
- Oversized 36" x 36" tiles and 9" x 59" planks install over large areas quickly
- 5mm overall thickness and 20 mil commercial wear layer for superior durability
- M-Force™ Enhanced Urethane finish for stain and wear resistance
- Twice as thick as traditional ERT for seamless transition with Mohawk Group carpet tiles
- Non-skid backing keeps tiles in place
- 59% Recycled Content (37% pre-consumer and 22% post-consumer content)


Interdeco™

LOOSE LAY ERT CONSTRUCTION

Hot & Heavy loose lay enhanced resilient tile features a 20 mil commercial wear layer, M-Force™ Enhanced Urethane and polish-optional finish for versatile, cost-effective maintenance. The weight of the product and the unique non-skid backing texture allows for loose lay installation.

LOOSE LAY SELLING FEATURES

- Install with Mohawk recommended adhesives and Mohawk AccuSound™ underlayment for improved sound absorption.

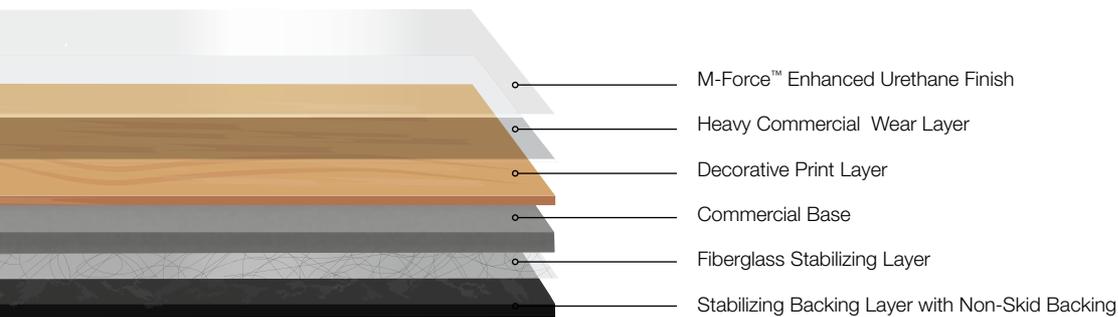

Specifications

Secoya C0009
Bolder C0010

DESIGN

Size	
Secoya	9.25" W x 59.25" L (235mm x 1505mm)
Bolder	36" W x 36" L (914.4mm x 914.4mm)
Overall Gauge	.20" (5mm)
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Enhanced Urethane
Colors Available	
Secoya	10
Bolder	4
Installation	Perimeter or Full Spread Adhesive
Packaging	
Secoya	22.84 sqft per carton / 6 pcs per carton / 40.77 lbs per carton
Bolder	36 sqft per carton / 4 pcs per carton / 63.48 lbs per carton

PERFORMANCE

Construction	Commercial Grade Loose Lay Enhanced Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance	ASTM F2055 - Passes - ±0.016 in. per linear foot
Thickness	ASTM F386 - Passes - As Specified ±0.005 in.
Flexibility	ASTM F137 - Passes - ≤ 1.0 in., no cracks or breaks
Dimensional Stability	ASTM F2199 - Passes - ≤ 0.020 in. per linear foot
Static Load Limit	ASTM F970 - Passes, modified - 1000 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Resistance to Chemicals	ASTM F925 - Passes - No Change
Resistance to Light	ASTM F1515 - Passes - ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes - ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Passes - ≥ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Passes - < 450

SUSTAINABILITY

Certification	FloorScore® Certified
Recycled Content	59% Recycled Content: 37% pre-consumer and 22% post-consumer content

Secoya

Collection	Hot and Heavy
Style Name	Secoya
Style Number	C0009
Product Type	LVT
Size	9" X 59"

Feature	Description
Overall Thickness	5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM 2421/ASTM F2055 - Passes - ± 0.10
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	22.84
Pounds per Carton	38.76
Classification	ASTM F1700 - Class III, Type B - Embosse



Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Benmore

Color code: 123
Style number: C0009



Kew Gardens

Color code: 142
Style number: C0009



Atwell Mill

Color code: 148
Style number: C0009



Arrowhead Creek

Color code: 152
Style number: C0009



Redwood

Color code: 333
Style number: C0009



Sierra

Color code: 352
Style number: C0009



Oakbark

Color code: 833
Style number: C0009



Picton Park

Color code: 872
Style number: C0009



Woodland

Color code: 878
Style number: C0009



Converse Basin

Color code: 936
Style number: C0009



Alder Creek

Color code: 945
Style number: C0009



Open Canyon

Color code: 946
Style number: C0009



Calaveras

Color code: 989
Style number: C0009



Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified - 1000 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020 in. per linear foot
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single read 10%
Resistance to Chemicals	ASTM F925 - Passes - No Change or Slight Change
Resistance to Heat	ASTM F1514 - Passes - IE 16
Resistance to Light	ASTM F1515 - Passes - IE 16
Critical Radiant Flux	ASTM E648 - Passes - 0.45 watts/cm ² , Class 1
Smoke Density	ASTME662 - Part A - less than 450

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Country of Origin	South Korea
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO2e/ft2
Embodied Carbon	1.11 kg CO2e/ft2



Warranties

Limited 20 Year M-Force Ultra Commercial Warranty


Bolder

Collection Hot and Heavy
 Style Name Bolder
 Style Number C0010
 Product Type LVT
 Size 36" X 36"



Feature	Description
Overall Thickness	5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Surface Profile	Light Emboss
Squareness	ASTM 2421/ASTM F2055 - Passes - ±0.10
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	36
Pounds per Carton	61.12
Classification	ASTM F1700 - Class III, Type B - Embossed

Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



River Rock

Color code: 832
 Style number: C0010



Schist

Color code: 888
 Style number: C0010



Pebble

Color code: 925
 Style number: C0010



Onyx

Color code: 999
 Style number: C0010

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified - 1000 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020 in. per linear foot
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single read 10%
Resistance to Chemicals	ASTM F925 - Passes - No Change or Slight Change
Resistance to Heat	ASTM F1514 - Passes - $\Delta E \leq 8$
Resistance to Light	ASTM F1515 - Passes - $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Passes - ≤ 0.45 watts/cm ² , Class 1
Smoke Density	ASTME662 - Part A - less than 450



Sustainability

Feature	Description
Floor Score	Floor Score Certified
Country of Origin	South Korea
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO ₂ e/ft ²
Embodied Carbon	1.11 kg CO ₂ e/ft ²

Warranties

Limited 20 Year M-Force Ultra Commercial Warranty