



# Hit The Mark



Hit The Mark enhanced resilient tile features wood, stone and textile visuals with a substantial 30 mil wear layer, for a floor as stylish as it is durable. From traditional cherry to wire-brushed rustic aesthetics, Hit The Mark's diverse selection of woods are available in rich, nature-inspired colors. The substantial wide planks feature a straight grain visual. Traditional slate, sophisticated limestone and trend-forward striated textiles in versatile natural colors, as well as subtle grayed blues and greens, complete the range of visuals for Hit The Mark.



Cover Image: Hit The Mark | 979 Aim, 937 Deliver  
Hit The Mark | 721 Accomplish, 936 Accurate, 946 Online



---

## Hit The Mark Features

- Broad selection of straight-grain wood visuals in warm and cool tones
- Modern textile and stone visuals featuring sophisticated, calming neutrals
- Designed alongside our carpet collections for easy coordination
- 3mm overall thickness and 30 mil commercial wear layer for superior durability
- M-Force™ Enhanced Urethane finish for stain and wear resistance
- Polish-optional surface provides easy maintenance and lower life cycle cost
- Versatile plank and tile sizes allow for a wide variety of installation designs
- Limited 20 Year Commercial Warranty
- FloorScore® Certified




---

## Glue Down ERT Construction

Hit The Mark enhanced resilient tile features a 30 mil commercial wear layer with an M-Force™ Enhanced Urethane finish that is polish-optional for versatile, cost-effective maintenance.

- M-Force™ Enhanced Urethane Finish \_\_\_\_\_
- Heavy Commercial Wear Layer \_\_\_\_\_
- Decorative Print Layer \_\_\_\_\_
- Commercial Base \_\_\_\_\_
- Stabilizing Backing Layer \_\_\_\_\_



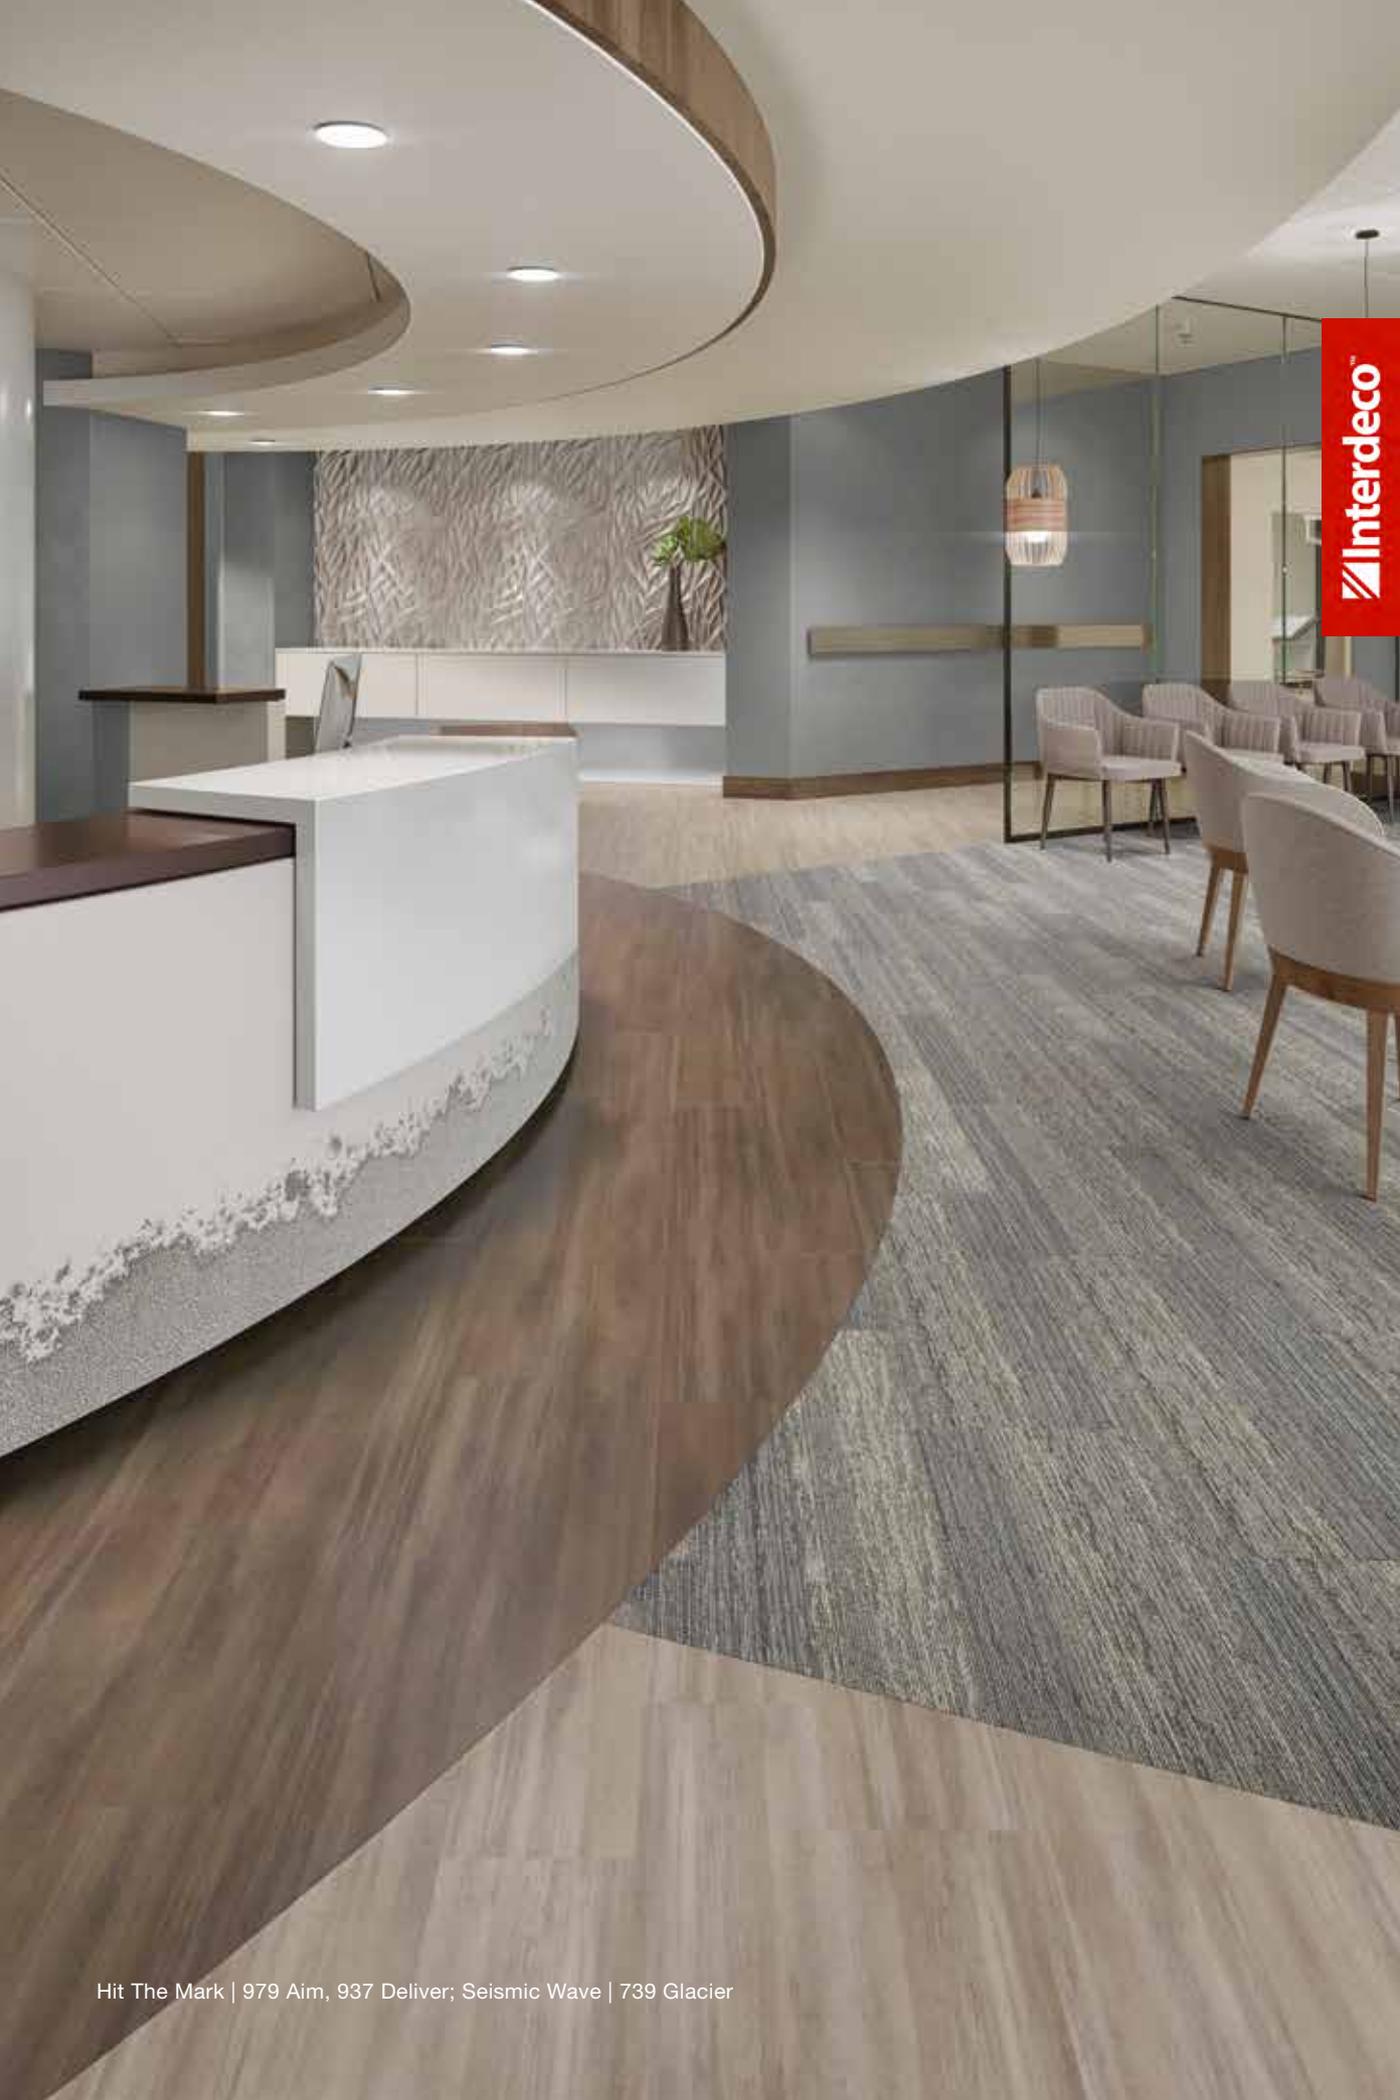



# Expedition Collection

Ecosphere | 739 Glacier

Interdeco™

The expedition continues as man's quest for new frontiers delves into uncharted territory. Inspired by shifting planes of light and swirling celestial forms, the Expedition Collection pushes the boundaries of commercial design. Use patterns individually or create color progressions with the nine patterns and eight colorways of Expedition.

- Duracolor® Premium Nylon Fiber
- Backed with EcoFlex™ NXT
- Installation option with FlexLok™ Tabs for adhesive-free installation
- Declared Red List Free
- Specific styles are available as 12" x 36" planks or 24" x 24" tiles.



# Hit The Mark

## Colorways

7.25" x 48"



241 Make It



262 Precise



751 Prevail




852 Target



862 Exact



937 Deliver



941 Focus



956 Jackpot



979 Aim



978 Score

12" x 24"



651 Strike



938 The Mark



955 Grade



965 Avail

18" x 36"



721 Accomplish



936 Accurate



946 Online



968 Success



# Specifications

Style Name	Hit The Mark
Style Number	C0095
Brand	Mohawk Group – Hard Surface
Product Type	Enhanced Resilient Tile



## DESIGN

Overall Gauge	.12" (3mm)
Wear Layer	30 mil (0.7mm)
Finish	M-Force™ Enhanced Urethane
Colors Available	
Wood Visuals	10
Textile Visuals	4
Stone Visuals	4
Size	
Wood Visuals	7.25" x 48"
Stone Visuals	12" x 24"
Textile Visuals	18" x 36"
Packaging	
Wood Visuals	38.67 sf/ctn; 16 pcs/ctn; 41.2 lbs/ctn
Stone Visuals	36 sf/ctn; 18 pcs/ctn; 38.36 lbs/ctn
Textile Visuals	36 sf/ctn; 8 pcs/ctn; 38.35 lbs/ctn
Installation	Glue Down
Required Adhesive	MS160 Spray Adhesive, M95.0 Resilient Flooring Adhesive, M700 Pressure Sensitive Adhesive



## PERFORMANCE

Construction	Commercial Grade Enhanced Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055/F2421 - Passes - 0.10" max
Size and Tolerance	ASTM F2055/F2421 - Passes - $\pm 0.16$ "/linear foot
Thickness	ASTM F386 - Passes - as specified $\pm 0.005$ "
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - $\leq 0.020$ "/linear foot
Static Load Limit	ASTM F970 - Passes, modified at 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Slip Resistance	ASTM C1028 - Passes - Wet: $\geq 0.5$
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes - $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Passes - Class 1 ( $>0.45$ W/cm <sup>2</sup> )
Smoke Density	ASTM E662 Part A - Less than 450



## SUSTAINABILITY

Certification	FloorScore® Certified
---------------	-----------------------



## SERVICE

Warranty	Limited 20 Year Commercial Warranty
----------	-------------------------------------

# Hit The Mark

Style Name: Hit The Mark  
 Style Number: C0095  
 Product Type: LVT  
 Size: 12" X 24"



Feature	Description
Overall Thickness	3 mm
Wear Layer	30 mil (0.7 mm)
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM F2055/F2421 - Passes - 0.10" max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	36
Pounds per Carton	39.78
Classification	ASTM F1700 - Class III, Type B - Embossed

## Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

## Colorways



### Strike

Color code: 651  
Style number: C0095



### Accomplish

Color code: 721  
Style number: C0095



### Accurate

Color code: 936  
Style number: C0095



### The Mark

Color code: 938  
Style number: C0095



### Online

Color code: 946  
Style number: C0095



### Grade

Color code: 955  
Style number: C0095



### Avail

Color code: 965  
Style number: C0095



### Success

Color code: 968  
Style number: C0095



### Make It

Color code: 241  
Style number: C0095



### Precise

Color code: 262  
Style number: C0095



### Prevail

Color code: 751  
Style number: C0095



### Target

Color code: 852  
Style number: C0095



### Exact

Color code: 862  
Style number: C0095



### Deliver

Color code: 937  
Style number: C0095



### Focus

Color code: 941  
Style number: C0095



### Jackpot

Color code: 956  
Style number: C0095



### Score

Color code: 978  
Style number: C0095



### Aim

Color code: 979  
Style number: C0095

## Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1500 psi
Dimensional Stability	ASTM F2199 - Passes - ≤ 0.020"/linear foot
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE ≤ 8
Resistance to Light	ASTM F1515 - Passes - ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Passes - ≤ 0.45 watts/cm <sup>2</sup> , Class 1
Smoke Density	ASTM E662 Part A - Less than 450

## Sustainability

Feature	Description
Floor Score	Floor Score Certified
Country of Origin	China
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO2e/ft2
Embodied Carbon	1.11 kg CO2e/ft2



## Warranties

Limited 20 Year M-Force Ultra Commercial Warranty