



Large & Local



Large & Local is an innovative enhanced resilient tile featuring eight clean wood visuals with minimal graining and eight rustic visuals with coarse graining and circle sawn texture. With a natural color range and matte surface reminiscent of European hand-oiled finishes, these versatile tiles are well-suited for any interior, from modern to traditional. The large planks are extra-wide and long, 9.25” x 59”, and each color is named after a local mountain gap or destination located close to our North Georgia resilient production facility.







 Interdeco™

945 Nottely, Thematic Thread 869 Bronzite



 Interdeco™







Large & Local Colorways



832 Tellico



822 Unicoi



865 Roan



855 Bly



888 Sumter



898 Chattahoochee



958 Cloudland



938 Tray



948 Sandhill



978 Woody




945 Nottely



965 Hightower



975 Reservoir

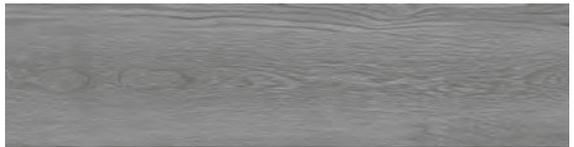

955 Jarrard



995 Damascus



985 Neels



Textural Effects COORDINATING PLANK & BROADLOOM

Textural Effects aims to activate our senses and brings a sense of tactility to our day. The desire for soft groundcover visuals such as linen textiles and organic patterns are met with tactility and comfort to sustain us in all types of spaces. All Textural Effects styles provide visual and tactile contrast when used with other finishes that have a smooth surface or high gloss, and they look especially warm and rich with wood hard surfaces.



FEATURES

- 12" x 36" Carpet Plank available in two styles: Tactile Infusion and Thematic Thread
- Broadloom available in two styles: Moss Moderne and Matte Finish
- Broadloom patterns also available as area rugs up to 12' x 45'
- Duracolor® Tricor Premium Nylon
- NSF/ANSI 140 Gold
- Carpet Plank is Living Product Challenge Petal Certified
- Declared Red List Free, EPD and HPD



Tactile Infusion 968 Concrete, Thematic Thread 968 Concrete



978 Woody

Specifications

Large & Local C0128

DESIGN

Size	9.25" W x 59" L (234.95 mm x 1498.6 mm)
Overall Gauge	4.5mm
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Ultra Enhanced Urethane
Colors Available	16 Colors
Packaging	18.95 sq. ft. per carton / 5 pcs per carton / 17 lbs per carton

*For detailed warranty, adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Grade Dryback Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F 2421 - Passes - $\pm 0.10"$ max
Size and Tolerance	ASTM F2421 - Passes - $\pm 0.16"/$ linear foot
Thickness	ASTM F386 - Passes - as specified $\pm 0.005"$
Flexability	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1000 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes - $\Delta E < 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E < 8$
Critical Radiant Flux	ASTM E648 - Class 1 (> 0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450

SUSTAINABILITY

Certification	FloorScore® Certified
Manufacturing Location	USA



Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
800.554.6637
mohawkgroup.com

Large and Local Wood

Collection	Large and Local
Style Name	Large and Local Wood
Style Number	C0128
Product Type	LVT
Size	9.25 in x 59 in



Feature	Description
Overall Thickness	4.5 mm
Wear Layer	20 mil (0.51mm)
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM F 2421 - Passes - ± 0.10 " max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	26.52
Pounds per Carton	44.8
Classification	ASTM F1700 - Class III, Type B - Embossed

Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Unicoi

Color code: 822
Style number: C0128



Tellico

Color code: 832
Style number: C0128



Bly

Color code: 855
Style number: C0128



Roan

Color code: 865
Style number: C0128



Sumter

Color code: 888
Style number: C0128



Chattahoochee

Color code: 898
Style number: C0128



Tray

Color code: 938
Style number: C0128



Nottely

Color code: 945
Style number: C0128



Sandhill

Color code: 948
Style number: C0128



Jarrard

Color code: 955
Style number: C0128



Cloudland

Color code: 958
Style number: C0128



Hightower

Color code: 965
Style number: C0128



Reservoir

Color code: 975
Style number: C0128



Woody

Color code: 978
Style number: C0128



Neels

Color code: 985
Style number: C0128



Damascus

Color code: 995
Style number: C0128



Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1000 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE <8
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Certification Detail	Made from 100% post-industrial recycled materials in the US inside of a Zero-W
Country of Origin	USA
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.03 kg CO2e/ft2
Embodied Carbon	0.6 kg CO2e/ft2




Warranties

Limited 20 Year M-Force Ultra Commercial Warranty

Rendered Flax

Collection	Large and Local
Style Name	Rendered Flax
Style Number	C0192
Product Type	LVT
Size	6 in x 48 in

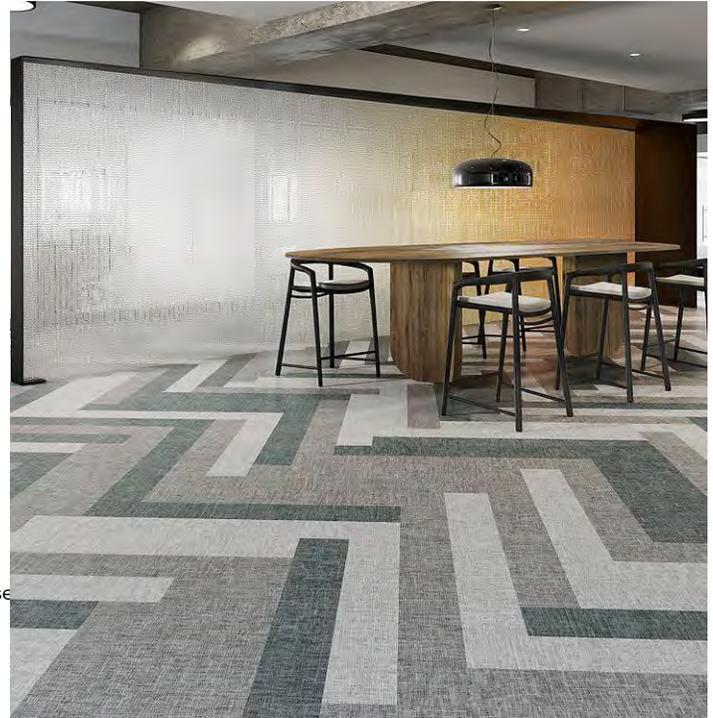

Feature	Description
Overall Thickness	4.5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM F 2421 - Passes - ± 0.10 " max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	20
Pounds per Carton	34.1
Classification	ASTM F1700 - Class III, Type B - Embossed

Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Boreal

Color code: 95
Style number: C0192



Crisp

Color code: 127
Style number: C0192



Beach Grass

Color code: 128
Style number: C0192



Hemlock

Color code: 415
Style number: C0192



Dusk

Color code: 655
Style number: C0192



Wild Indigo

Color code: 698
Style number: C0192



Buckthorn

Color code: 812
Style number: C0192



Madder Root

Color code: 847
Style number: C0192



Walnut Husk

Color code: 848
Style number: C0192



Ice

Color code: 918
Style number: C0192



Snowbank

Color code: 919
Style number: C0192



Intrepid

Color code: 928
Style number: C0192



Mountain Ash

Color code: 938
Style number: C0192



Mist

Color code: 961
Style number: C0192



Coir Gray

Color code: 992
Style number: C0192



Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1000 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE <8
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.031 kg CO ₂ e/ft ²
Embodied Carbon	0.62 kg CO ₂ e/ft ²

Warranties

Limited 20-Year M-Force Ultra Commercial Warranty



Reforestation

Collection	Large and Local
Style Name	Reforestation
Style Number	C0188
Product Type	LVT
Size	9.25 in x 59 in

Feature	Description
Overall Thickness	4.5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM F 2421 - Passes - ±0.10" max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	26.52
Pounds per Carton	44.8
Classification	ASTM F1700 - Class III, Type B - Embosse



Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Bridal Veil

Color code: 220
Style number: C0188



Waterwheel

Color code: 225
Style number: C0188



Cumberland

Color code: 838
Style number: C0188



Burney

Color code: 839
Style number: C0188



Ruby

Color code: 858
Style number: C0188



Marion

Color code: 862
Style number: C0188



Yosemite

Color code: 868
Style number: C0188



Turner

Color code: 889
Style number: C0188



Racehorse

Color code: 939
Style number: C0188



Shannon

Color code: 949
Style number: C0188



Alberta

Color code: 979
Style number: C0188

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1000 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes -ΔE <8
Resistance to Light	ASTM F1515 - Passes -ΔE <8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 Part A - Less than 450

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Certification Detail	Utilizes 100% closed-loop pre-consumer recycled content allocation
Country of Origin	USA
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.031 kg CO2e/ft2
Embodied Carbon	0.62 kg CO2e/ft2


Warranties

Limited 20-Year M-Force Ultra Commercial Warranty



Rugged Foundation

Collection Large and Local
 Style Name Rugged Foundation
 Style Number C0191
 Product Type LVT
 Size 6 in x 48 in

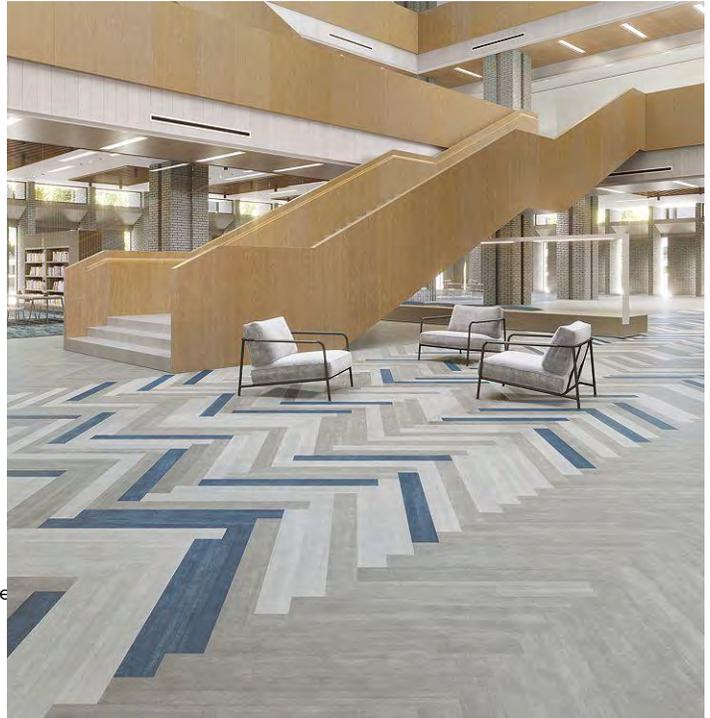

Feature	Description
Overall Thickness	4.5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Surface Profile	Overall Emboss
Squareness	ASTM F 2421 - Passes - ±0.10" max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	20
Pounds per Carton	34.1
Classification	ASTM F1700 - Class III, Type B - Embossed

Recommended Installation Methods



Monolithic



Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Pearlescent

Color code: 120
Style number: C0191



Afterglow

Color code: 230
Style number: C0191



Sandbar

Color code: 250
Style number: C0191



Ambergris

Color code: 270
Style number: C0191



Angelite

Color code: 625
Style number: C0191



Imperial

Color code: 650
Style number: C0191



Cinnabar

Color code: 860
Style number: C0191



Dark Umber

Color code: 888
Style number: C0191



Moonstone

Color code: 910
Style number: C0191



New Clay

Color code: 940
Style number: C0191



Charcoal Dust

Color code: 980
Style number: C0191

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1000 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE <8
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.031 kg CO ₂ e/ft ²
Embodied Carbon	0.62 kg CO ₂ e/ft ²

Warranties

Limited 20-Year M-Force Ultra Commercial Warranty

Pattern of Time

Collection	Large and Local
Style Name	Pattern of Time
Style Number	64033
Product Type	LVT
Size	9.25 in x 59 in



Feature	Description
Overall Thickness	4.5 mm
Wear Layer	20 mil
Finish	M-Force™ Ultra
Surface Profile	Matte Micro Bevel
Squareness	ASTM F 2421 - Passes - ±0.10" max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	26.52
Pounds per Carton	44.8
Classification	ASTM F1700 - Class III, Type B - Embosse

Recommended Installation Methods



Monolithic



Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Saxe Essence

Color code: 575
Style number: 64033



Saxe Soul

Color code: 585
Style number: 64033



Viridescent

Color code: 678
Style number: 64033



Dominican Amber

Color code: 828
Style number: 64033



Gilded

Color code: 858
Style number: 64033



Whisper

Color code: 925
Style number: 64033



Sun Amber

Color code: 928
Style number: 64033



Silver Lining

Color code: 969
Style number: 64033

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1000 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE <8
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm2)
Smoke Density	ASTM E662 Part A - Less than 450



Sustainability

Feature	Description
Floor Score	Floor Score Certified
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO2e/ft2
Embodied Carbon	1.11 kg CO2e/ft2

Warranties

Limited 20 Year M-Force Ultra Commercial Warranty