



# Hot & Heavy

Grown Up



Mohawk Group

Grown Up is the newest addition to Hot & Heavy, our award winning collection of loose lay enhanced resilient tile. European hardwood visuals receive Emboss-In-Register texture to match the grain beautifully, providing the most realistic and distinctive visual of long-plank hardwoods on the market today. Grown Up boasts a phthalate-free construction made with a minimum 8% of rapidly renewable bio-based content. Hefty 5 mm planks create a seamless transition to carpet and offer excellent acoustics, while the oversize, loose lay format ensures a quick installation.



Interdeco™

Grown Up 138 Kingsley  
Cover: Grown Up 758 Hermes and 958 Cole



Mohawk Group

Interdeco™



Grown Up 958 Cole



Grown Up 758 Hermes



Mohawk Group

Grown Up Colorways



132 Vera



138 Kingsley



241 Knox



322 Finn



358 Jackson



628 Lenox



758 Hermes



851 Butler



853 Emerson



958 Cole




Grown Up 758 Hermes, 958 Cole




# Moving Floors

Designed to change dynamically based on the user's point of view, Moving Floors was inspired by the geometry and illusion of op-art and the multi-layered and dimensional beauty of our cultural landscape. This collection empowers designers to create kinetic floor scapes through limitless combinations of geometric patterning and coordinating textured solids. Available in five unique patterns across ten style dependent colorways in a 24" x 24" tile size.

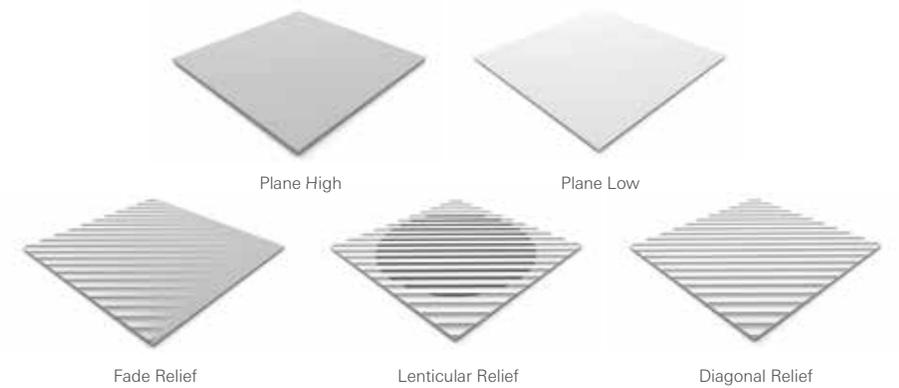

Grown Up 138 Kingsley, Diagonal Relief 846 Teak

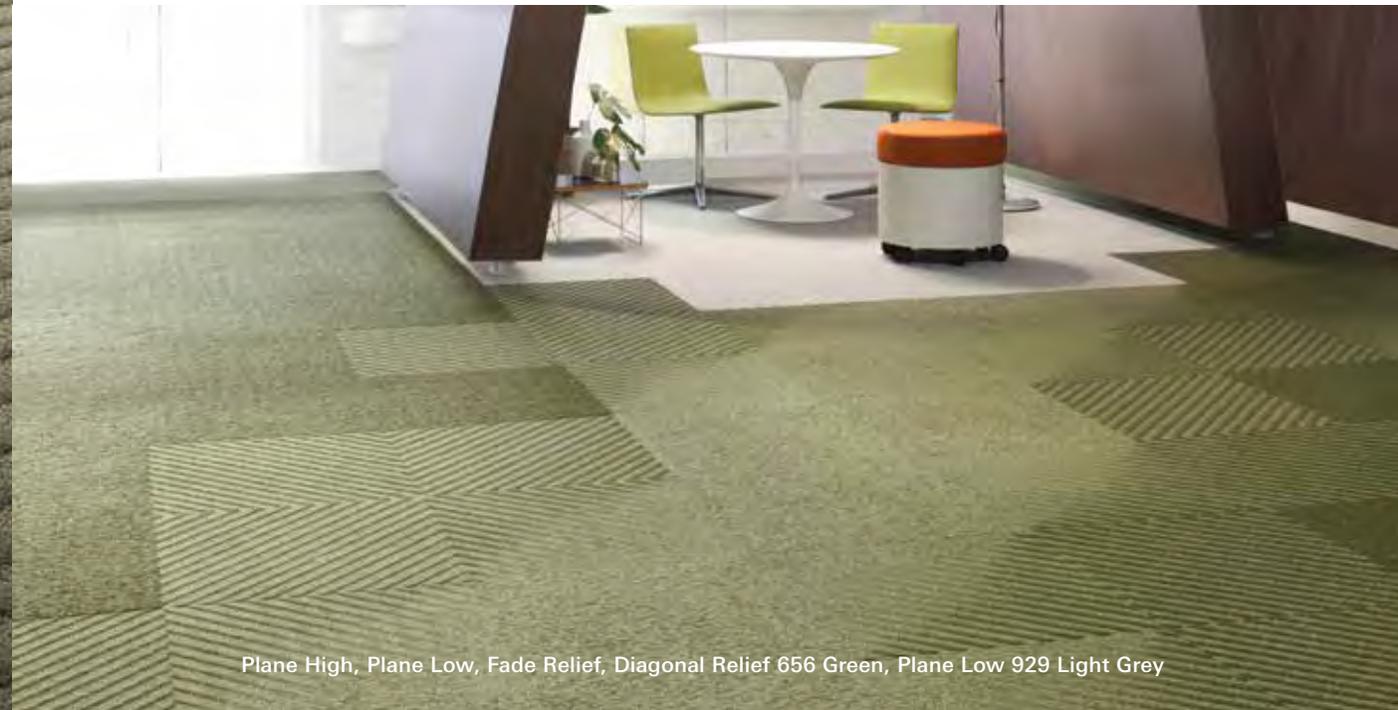

Plane High, Plane Low, Fade Relief, Diagonal Relief 656 Green, Plane Low 929 Light Grey



# Grown Up LOOSE LAY ERT

## PERFORMANCE


- Emboss-In-Register texture over high definition wood visuals to create one of the most realistic loose lay resilient planks in the industry today
- Oversized 9" x 59" planks install over large areas quickly
- 5mm overall thickness and 20 mil commercial wear layer for superior durability
- M-Force™ Enhanced Urethane finish for stain and wear resistance
- Twice as thick as traditional enhanced resilient tile for seamless transition with Mohawk Group carpet tiles
- Non-skid backing keeps tiles in place
- Minimum of 8% bio-based rapidly renewable resource content by total product weight helps avoid harmful phthalates

## LOOSE LAY ERT CONSTRUCTION

Hot & Heavy loose lay enhanced resilient tile features a 20 mil commercial wear layer, M-Force™ Enhanced Urethane and polish-optional finish for versatile, cost-effective maintenance. The weight of the product and the unique non-skid backing texture allows for loose lay installation.

## LOOSE LAY SELLING FEATURES

- Install with Mohawk recommended adhesives and Mohawk AccuSound™ underlayment for improved sound absorption.

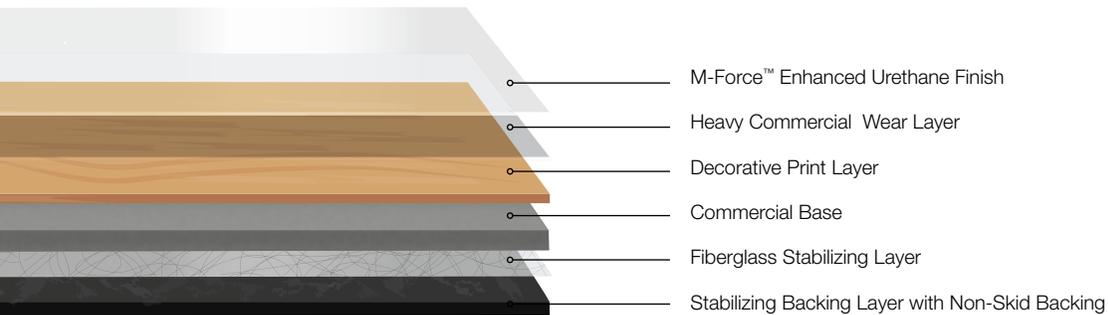

# Specifications

## Grown Up C0075

### DESIGN

Size	9" x 59" (228.6mm x 1516.9mm)
Overall Gauge	.20" (5mm)
Wear Layer	20 mil (0.5mm)
Finish	M-Force™ Enhanced Urethane
Texture	Emboss-In-Register
Colors Available	10
Packaging	22.4 sq. ft. per carton / 6 pcs per carton / 40.77 lbs per carton

### PERFORMANCE

Construction	Commercial Grade Loose Lay Enhanced Resilient Tile
Classification	ASTM F-1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance	ASTM F2055 - Passes - ± 0.016 in. per linear foot
Thickness	ASTM F386 - Passes - Nominal ± 0.005 in.
Flexibility	ASTM F137 - Passes - ≤ 1.0 in. mandrel
Dimensional Stability	ASTM F2199 - Passes - ≤ 0.020 in. per linear foot
Static Load Limit	ASTM F970 - Passes - modified - 1000 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Resistance to Chemicals	ASTM F925 - Passes - No Change or Slight Change
Resistance to Light	ASTM F1515 - Passes - ΔE < 8
Resistance to Heat	ASTM F1514 - Passes - ΔE < 8
Critical Radiant Flux	ASTM E648 - Passes - >.45 watts/cm², Class 1
Smoke Density	ASTM E662 Part A - < 450

### SUSTAINABILITY

Certification	FloorScore® Certified
Renewable Resource Content	Minimum of 8% bio-based rapidly renewable resource content by total product weight




\*For detailed warranty, adhesive and installation information visit [mohawkgroup.com](http://mohawkgroup.com)



## Grown Up

Collection	Hot and Heavy
Style Name	Grown Up
Style Number	C0075
Product Type	LVT
Size	9" X 59.72"

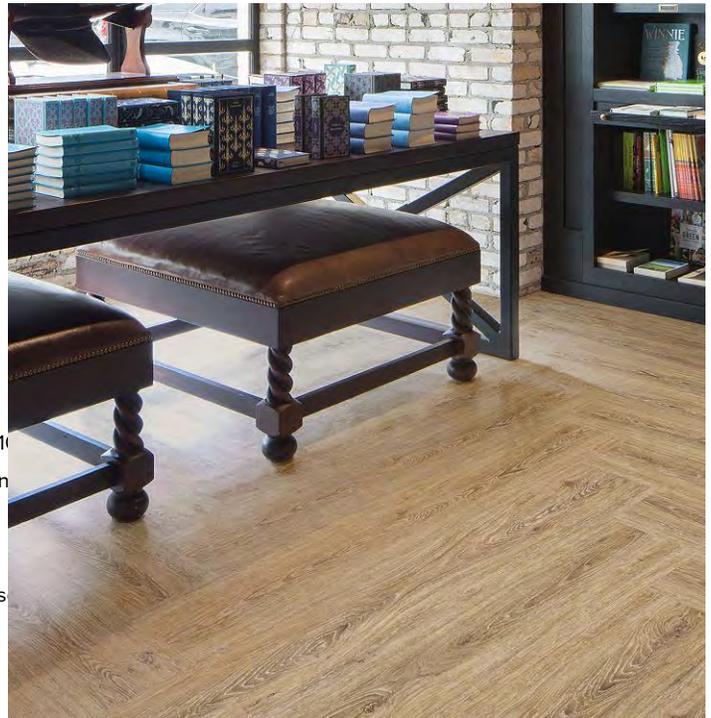

Feature	Description
Overall Thickness	5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force Ultra
Surface Profile	Embossed In Register
Squareness	ASTM F2055 -10 Passes - maximum 0.01
Flexibility	ASTM F137 - Passes - 1 in. (25.4-mm man
Square Foot per Carton	22.4
Pounds per Carton	41.46
Classification	ASTM F-1700 - Class III, Type B - Emboss

## Recommended Installation Methods



Monolithic



Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

## Colorways



### Vera

Color code: 132  
Style number: C0075



### Kingsley

Color code: 138  
Style number: C0075



### Knox

Color code: 241  
Style number: C0075



### Finn

Color code: 322  
Style number: C0075



### Jackson

Color code: 358  
Style number: C0075



### Lenox

Color code: 628  
Style number: C0075



### Hermes

Color code: 758  
Style number: C0075



### Butler

Color code: 851  
Style number: C0075



### Emerson

Color code: 853  
Style number: C0075



### Cole

Color code: 958  
Style number: C0075

## Performance

Feature	Description
Static Load	ASTM F970 - Passes – Exceeds 1000 psi
Dimensional Stability	ASTM F2199 - Passes - no greater than 0.020 in./lin. Ft. (0.51 mm/305 mm)
Residual Indentation	ASTM F1914 - Passes - average less than 8%
Resistance to Chemicals	ASTM F925 - Passes - no change
Resistance to Heat	ASTM F1514 - Passes - less than 8 ave., max
Resistance to Light	ASTM F1515 - Passes - less than 8 ave., max
Critical Radiant Flux	ASTM E648 - Passes - > 0.45 watts/cm <sup>2</sup> , Class 1

## Sustainability

Feature	Description
Floor Score	Floor Score Certified
Country of Origin	China
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO <sub>2</sub> e/ft <sup>2</sup>
Embodied Carbon	1.11 kg CO <sub>2</sub> e/ft <sup>2</sup>

# Warranties

---

Limited 20 Year M-Force Ultra Commercial Warranty

