



Molveno

Molveno Woods Molveno Stones






Interdeco[™]

Molveno Woods 858 Warmstone, Molveno Stones 988 Cityscape

Molveno

FEATURES

- 10 stunning wood colors and 5 modern stone colors
- Overall plank thickness at 6 mm w/ attached cushion
- Embossed in Register and wire brush texture wood visuals
- 20 mil wear layer provides scratch and scuff resistance
- Installs over most existing hard surface flooring
- Superior dimensional stability
- No adhesive or underlayment required
- Immediate occupancy
- FloorScore® Certified

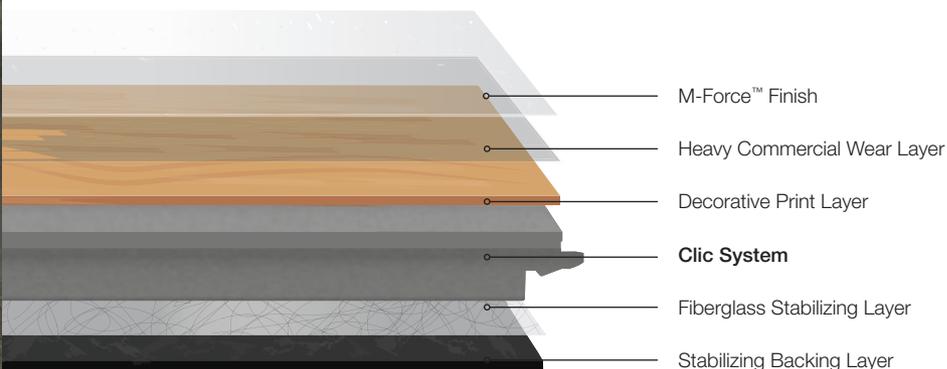





 Interdeco™



Interdeco[™]

Molveno Woods 817 Iced Mocha

Sunweave

Sunweave woven carpet responds to current desires for artisanal materials in the built environment. Inspired by women weavers of indigenous cultures around the world, Sunweave evokes natural patterns found in baskets, blankets and textiles. Shadow Pass features a grand linear ombre shadow that transitions along the loom and, therefore, the floor plane. Sunweave features our new innovative yarn system, Heathered Hues. This fiber's natural texture and blending provides a variegated wool-like appearance. The yarn is dematerialized for a low environmental impact, and no water is used in its production. Sunweave is Red List Free and designed to achieve the stringent requirements of the Living Product Challenge Petal Certification.



FEATURES

- Product Type: Broadloom
- Construction: Woven
- Duracolor® Premium Nylon
- Colors available: 4
- Size: 12' width (3.66m)
- Stain Release Technology: Permanent, Built into the Fiber
- Soil Release Technology: Sentry Soil Protection
- Living Product Challenge Petal Certified
- Green Label Plus Certified #3802



Shadow Pass 822 Sedge



Molveno Woods



121 Touch of Sand



855 Toasty



872 Jute Brown




817 Iced Mocha



982 Caraibe



858 Warmstone

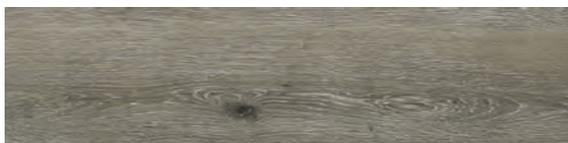

105 Argos



905 Tin Lizzie



983 Grounded



992 Ginger Root


Molveno Stones



979 Grey Matters




889 Software

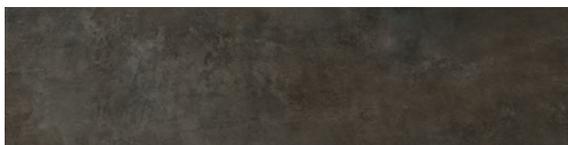

997 Night Owl



988 Cityscape

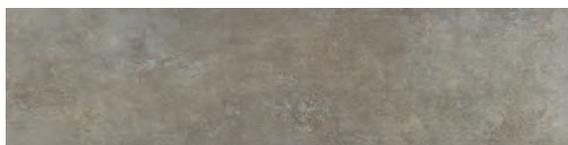

879 Perfect Greige



Specifications

Molveno Woods C0110
Molveno Stones C0109

DESIGN

Overall Gauge	6mm
Wear Layer	20 mil
Finish	M-Force™
Colors Available	
Molveno Woods	10
Molveno Stones	5
Size	
Molveno Woods	
Nominal	7" x 59"
Actual	7.75" x 59.75" (196.85 mm x 1517.65 mm)
Molveno Stones	
Nominal	12" x 36"
Actual	11.75" x 35.75" (298.45 mm x 908.05 mm)
Packaging	
Molveno Woods	19.294 sq. ft. per carton / 6 pieces per carton / 38 lbs per carton
Molveno Stones	17.503 sq. ft. per carton / 6 pieces per carton / 34.50 lbs per carton
Installation	Floating ERT with Unipush Locking System

PERFORMANCE

Construction	Commercial Grade Resilient Flooring with Rigid Polymeric Core
Squareness	ASTM F2421 - Passes - ± 0.10 " max
Size and Tolerance	ISO24337 - Plank @48" - Passes - ± 0.08 "
Thickness, product	ASTM F387 - Passes - as specified ± 0.005 "
Thickness, wear layer	ASTM F410 - Passes - Commercial Min 0.02"
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Curling	ASTM F2199 - Passes - 0.08" Max
Static Load Limit	ASTM F970 - Passes, modified at 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes - $\Delta E < 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E < 8$
Critical Radiant Flux	ASTM E648 - Class 1 (> 0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450

SUSTAINABILITY

Certification	FloorScore® Certified
Recycled Content	100% virgin vinyl

Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA. 30701
1-800-554-6637
mohawkgroup.com

C0110 PHOTO BROCHR LT



Molveno Woods

Collection	Molveno
Style Name	Molveno Woods
Style Number	C0110
Product Type	LVT
Size	7.75" X 59.75"

Feature	Description
Overall Thickness	6 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force
Surface Profile	Embossed In Register
Squareness	ASTM F2421 - Passes - ±0.10" max
Square Foot per Carton	19.29
Pounds per Carton	39.78



Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Argos

Color code: 105
Style number: C0110



Touch Of Sand

Color code: 121
Style number: C0110



Iced Mocha

Color code: 817
Style number: C0110



Toasty

Color code: 855
Style number: C0110



Warmstone

Color code: 858
Style number: C0110



Jute Brown

Color code: 872
Style number: C0110



Tin Lizzie

Color code: 905
Style number: C0110



Caraibe

Color code: 982
Style number: C0110



Grounded

Color code: 983
Style number: C0110



Ginger Root

Color code: 992
Style number: C0110



Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1500 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE < 8
Resistance to Light	ASTM F1515 - Passes - ΔE < 8
Critical Radiant Flux	ASTM E648 - Passes - ≤ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Less than 450

Sustainability

Feature	Description
Floor Score	Floor Score Certified
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.095 kg CO ₂ e/ft ²
Embodied Carbon	1.9 kg CO ₂ e/ft ²

Warranties

Limited 15 Year M-Force Commercial Warranty



Molveno Stones

Collection	Molveno
Style Name	Molveno Stones
Style Number	C0109
Product Type	LVT
Size	11.75" X 35.75"

Feature	Description
Overall Thickness	6 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force
Surface Profile	Emboss In Register
Squareness	ASTM F2421 - Passes - ±0.10" max
Square Foot per Carton	17.5
Pounds per Carton	36.18



Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Perfect Greige

Color code: 879
Style number: C0109



Software

Color code: 889
Style number: C0109



Grey Matters

Color code: 979
Style number: C0109



Cityscape

Color code: 988
Style number: C0109



Night Owl

Color code: 997
Style number: C0109

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1500 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE < 8
Resistance to Light	ASTM F1515 - Passes - ΔE < 8
Critical Radiant Flux	ASTM E648 - Passes - ≤ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Less than 450



Sustainability

Feature	Description
Floor Score	Floor Score Certified
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.095 kg CO ₂ e/ft ²
Embodied Carbon	1.9 kg CO ₂ e/ft ²

Warranties

Limited 15 Year M-Force Commercial Warranty