



Sakiori

Hemstitch Weave Linked



Mohawk Group challenges your perception of resilient tile flooring with Sakiori, a hard surface that brings visual and physical texture together in a new way. Combining the soft look of textiles and carpet with the durability of resilient hard surfaces, Sakiori speaks to our human desire for tactility. The Sakiori collection offers a traditional weave, a multi-width cord-like weave, and a vertical striated weave for three different designs. The collection's coordinating neutral color palette allows for mixing and matching to create unique installations to provide an elegant tactility in otherwise sleek environments.







Weave 729 Icansi, Spirit Moderne QTWFA71499-MW463

Area Rug Program

Mohawk Group believes in empowering architects and designers with the tools to achieve their vision. With the Area Rug Program, we expand the palette by merging the design of broadloom with the scale and versatility of area rugs. Simply put, Mohawk Group's broadloom offerings may now be transformed into beautiful area rugs in a few simple steps.

MOHAWK GROUP AREA RUGS

- Anchor large workspaces and intimate seating areas with added warmth and luxury
- Unify small and unique spaces
- Provide a refined foundational layer for bright and complex accent notes
- Protect hard surfaces
- Reduce noise and create quiet, contemplative spaces

HOW TO ORDER

1. Select your area rug style and color
2. Determine the size for your rug (LxW)
The maximum rug size is 12' x 45'
3. Determine if a rug underlayment will be needed
4. Determine the serging colorways or binding types.
5. Submit information along with ship-to details in one of three ways:
 - Contact your Mohawk Group Account Executive
 - Email custom_cs@mohawkind.com
 - Call 800.622.6228 ext. 24733

Mohawk Group Customer Service will contact you with the order confirmation including final cost





Linked 729 Sukumo





Hemstitch 9.25" x 59.25"



Hemstitch 729 Kapa



Hemstitch 889 Mosotho



Hemstitch 979 Lowveld



Hemstitch 868 Huipils



Hemstitch 935 Jerga



Hemstitch 753 Nedoko


Weave 18" x 36"




Weave 729 Icansi




Weave 889 Aguayus

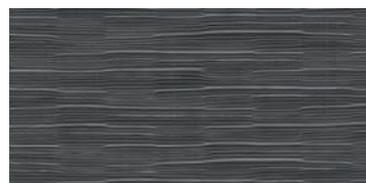

Weave 979 Serape

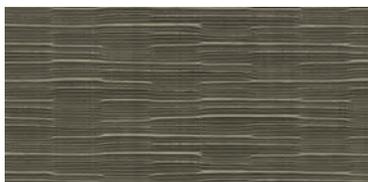

Weave 859 Zanshi

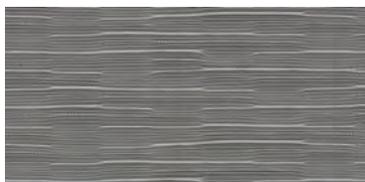

Weave 935 Mbongolo



Weave 365 Aizome

Linked 9.84" x 39.37"




Linked 729 Sukumo




Linked 889 Raffia



Linked 979 Immensus

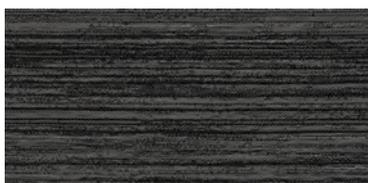

Linked 859 Mola

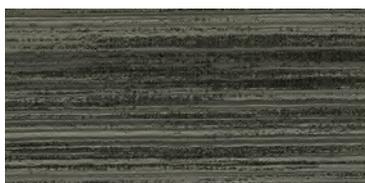

Linked 935 Vestige



Linked 868 Chilkat



Sakiori


PERFORMANCE

- Certified non-toxic, ortho-phthalate free
- M-Force Ultra Enhanced Urethane finish applied to resist stain by not absorbing liquids; therefore, making spills quick and easy to clean
- Approved for heavy commercial use
- Low maintenance
- Soft surface absorbing sound
- Consistent product thickness by patterns and size for mixing and matching different patterns
- Clean-cut finishing for preventing fraying



GLUE DOWN ENHANCED RESILIENT TILE CONSTRUCTION

- Sakiori enhanced resilient tiles feature a 20 mil commercial wear layer, M-Force™ Ultra Enhanced Urethane for stain resistance and soft, surface absorbing sound.

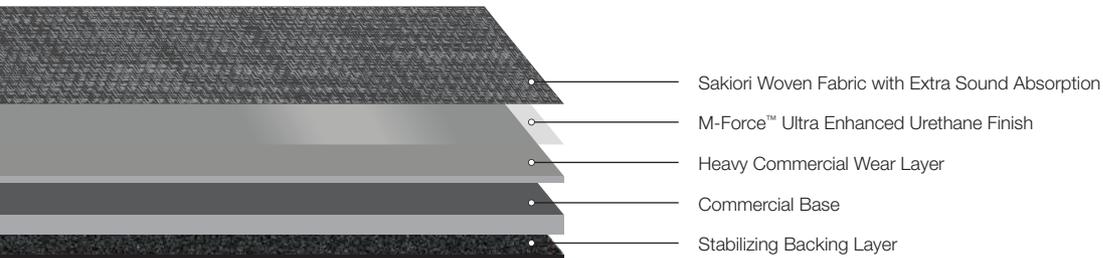



Extend & Protect

THE LIFE OF YOUR FLOOR

Performing proper maintenance on your flooring will help to extend the life of your flooring and ensure your investment is protected.

CLEANING

- Most dirt comes from outdoors. Installing well suited doormats will prevent 80% of the potential dirt and moisture from penetrating the premises. To remain effective, doormats should be vacuumed daily.
- Choose color carefully based on where the flooring will be used.
- Never use acetone or polish on flooring.
- For daily cleaning, we recommend vacuum cleaning.

REGULAR CLEANING

- Vacuum your flooring regularly to keep dust to a minimum.
- Stains/spills should be cleaned up as quickly as possible, and then rinsed with clean water. (see recommendations for stain removal below).

MANUAL CLEANING

- Manual cleaning should take place in smaller areas or in areas where machines cannot access. Periodic cleaning should be carried out regularly.
- Use a scrubbing brush, lukewarm water and all purpose neutral cleaner with a pH of 7-8.5.
- Wet vacuum or dry with soft/microfiber cloth.

STAINS

- For best results, stains should be dealt with immediately.
- Never use acetone, trichloroethylene, wax, greasy detergent or nail polish remover. Use a scrubbing brush and rinse with water.

STAINS	STAIN REMOVERS
Traces of acrylic and/or paint	Isopropyl / Denatured Alcohol. After applying the solvent, carefully wipe the flooring.
Drop of paint or chewing gum	Use a freeze spray and then delicately remove the paint/gum with a spatula.
Wine, beer, non-alcoholic beverages,	Hot water and a neutral cleaning agent with a few drops of ammonia if necessary.
Chocolate, oil, coffee/tea, grease, tar	Hot water and powerful alkaline detergent.
Shoe/scuff marks	Isopropyl / Denatured Alcohol. After applying the solvent, carefully wipe the flooring.
Ink, ball-point pen, marker, lipstick	Rinse thoroughly.
Rust	Rub with a dry rag.
Blood	Isopropyl / Denatured Alcohol.
Cigarette burns	A neutral cleaning agent and 10% oxalic acid, cold water and ammonia. Scrape with a spatula and then apply a few drops.

For full details, visit the technical resources section at mohawkgroup.com



Specifications

Sakiori Collection Hemstitch, Weave, Linked

DESIGN

Size	
Hemstitch	9.25" x 59.25" (235mm x 1505mm)
Weave	18" x 36" (457.2mm x 914.4mm)
Linked	9.84" x 39.37" (250mm x 1000mm)
Overall Thickness	3mm (.12")
Colors Available	18
Packaging	
Hemstitch	38.07 sqft per carton / 10 pcs per carton / 40.1 lbs per carton
Weave	36 sqft per carton / 8 pcs per carton / 37.92 lbs per carton
Linked	43.06 sqft per carton / 16 pcs per carton / 45.44 lbs per carton

*For detailed warranty, adhesive and installation information visit mohawkgroup.com

PERFORMANCE

Construction	Commercial Grade Dryback Enhanced Resilient Tile
Classification	ASTM F1700 - Class II—Surface-Decorated Vinyl Tile, Type A—Smooth Surface
Squareness	ASTM F 2421 - Passes - ± 0.10 " max
Size and Tolerance	ASTM F2421 - Passes - ± 0.016 "/linear foot
Thickness	ASTM F386 - Passes - as specified ± 0.005 "
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Light	ASTM F1515 - Passes $\Delta E \leq 8$
Resistance to Heat	ASTM F1514 - Passes $\Delta E \leq 8$
Critical Radiant Flux	ASTM E648 - Class 1 (>0.45 W/cm ²)
Smoke Density	ASTM E662 Part A - Less than 450

SUSTAINABILITY

Certification	FloorScore® Certified
Recycled Content	100% Virgin Vinyl



Mohawk Group

Mohawk Group
160 South Industrial Blvd.
Calhoun, GA, 30701
800.554.6637
mohawkgroup.com

CRV110 PHOTO BROCHURE LT

Hemstitch

Collection	Sakiori
Style Name	Hemstitch
Style Number	CR710
Product Type	LVT
Size	9.25" X 59.25"

Feature	Description
Overall Thickness	3 mm
Finish	M-Force
Squareness	ASTM F2421 - Passes - ±0.10" max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	38.07
Pounds per Carton	39.3
Classification	ASTM F1700 - Class II—Surface-Decorate



Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Kapa

Color code: 729
Style number: CR710



Nedoko

Color code: 753
Style number: CR710



Huipils

Color code: 868
Style number: CR710



Mosotho

Color code: 889
Style number: CR710



Jerga

Color code: 935
Style number: CR710



Lowveld

Color code: 979
Style number: CR710

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1500 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE <8
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Critical Radiant Flux	ASTM E648 - Passes - ≤ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Less than 450



Sustainability

Feature	Description
Floor Score	Floor Score Certified
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO ₂ e/ft ²
Embodied Carbon	1.11 kg CO ₂ e/ft ²

Warranties

Limited 15 Year M-Force Commercial Warranty

Weave

Collection	Sakiori
Style Name	Weave
Style Number	CR709
Product Type	LVT
Size	18" X 36"



Feature	Description
Overall Thickness	3 mm
Finish	M-Force
Squareness	ASTM F2421 - Passes - ± 0.10 " max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	36
Pounds per Carton	36.4
Classification	ASTM F1700 - Class II—Surface-Decorate

Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Aizome

Color code: 365
Style number: CR709



Icansi

Color code: 729
Style number: CR709



Zanshi

Color code: 859
Style number: CR709



Aguayus

Color code: 889
Style number: CR709



Mbongolo

Color code: 935
Style number: CR709



Serape

Color code: 979
Style number: CR709

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1500 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE <8
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Critical Radiant Flux	ASTM E648 - Passes - ≤ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Less than 450



Sustainability

Feature	Description
Floor Score	Floor Score Certified
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO ₂ e/ft ²
Embodied Carbon	1.11 kg CO ₂ e/ft ²

Warranties

Limited 15 Year M-Force Commercial Warranty

Linked

Collection	Sakiori
Style Name	Linked
Style Number	CR708
Product Type	LVT
Size	9.84" X 39.37"

Feature	Description
Overall Thickness	3 mm
Finish	M-Force
Squareness	ASTM F2421 - Passes - ± 0.10 " max
Flexibility	ASTM F137 - Passes - 1" mandrel
Square Foot per Carton	43.06
Pounds per Carton	45.44
Classification	ASTM F1700 - Class II—Surface-Decorate



Recommended Installation Methods



Monolithic




Monolithic Stepping



Half Lap



Random



Brick Ashlar



Herringbone

Colorways



Sukumo

Color code: 729
Style number: CR708



Mola

Color code: 859
Style number: CR708



Chilkat

Color code: 868
Style number: CR708



Raffia

Color code: 889
Style number: CR708



Vestige

Color code: 935
Style number: CR708



Immensus

Color code: 979
Style number: CR708

Performance

Feature	Description
Static Load	ASTM F970 - Passes, modified at 1500 psi
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Residual Indentation	ASTM F1914 - Passes - Average less than 8% maximum single reading 10%
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change
Resistance to Heat	ASTM F1514 - Passes - ΔE <8
Resistance to Light	ASTM F1515 - Passes - ΔE <8
Critical Radiant Flux	ASTM E648 - Passes - ≤ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 Part A - Less than 450



Sustainability

Feature	Description
Floor Score	Floor Score Certified
Mindful Materials	Participates in Mindful Materials Library
Environmental Product Declaration	EPD Vinyl Tile
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.055 kg CO ₂ e/ft ²
Embodied Carbon	1.11 kg CO ₂ e/ft ²

Warranties

Limited 15 Year M-Force Commercial Warranty