



3

Seek Unique 7989 Black Velvet (Monolithic Installation) Opposite:Coolly Noted 7989 Black Velvet (Monolithic Installation) Cover: Picture This 7989 Black Velvet (Monolithic Installation)





Coolly Noted 7989 Black Velvet (Multi-Directional Installation) Opposite: Picture This 7989 Black Velvet (Multi-Directional Installation)

-

- and



# Mixology

The styles in our Mixology Collection were designed to celebrate the breadth of color available in today's carpet market while providing the customer with the simplest installation and flooring management possible. The patterns are composed of 5 of the most popular neutral colors mixed in with a kaleidoscope of randomly chosen end-of-lot yarns. These multicolored yarns are diverted from our excess yarn lots and given new life in strikingly beautiful carpet rather than being down-cycled into other industry products. The beauty of this product is in the fact that the embedded pattern and the neutral color remain consistent from tile to tile while the accent colors change, making each tile unique. It is this subtle color variation that contributes to the ease of installation by eliminating concerns about matching dye lots and limited installation methods. The Mixology Collection is the perfect solution for those seeking to celebrate color as well as those who recognize the positive environmental impact that comes from redefining beautiful with repurposed yarn.

### FEATURES

- No 2 tiles are alike but work flawlessly together on your floor
- All installation methods available
- Diverting useful materials from the waste stream is good for the environment
- All styles are available in Quickship



Mohawk Group leads the building products industry in transparency with the largest selection of products with Declare Labels, Health Product Declarations (HPDs), and Environmental Product Declarations (EPDs). What's more, we offer over 500 Red List Free Declared products.



### OUR COMMITMENT

As a Gaia sponsor of the International Living Future Institute (ILFI), we are committed to revolutionary programs that are redefining the green building movement. These include the ILFI's Living Building Challenge and Declare programs.

Declare Labels are a 'nutrition label' for the building industry, providing ingredients, source and manufacturing locations. We offer you:

- The most products with Declare Labels
- The most Red List Free products

We have eliminated the mystery of product ingredients so you get total product transparency.\*

# **Declare**.

Nylon Modular Tile on EcoFlex Matrix Mohawk Group

Final Assembly: Glasgow, VA, USA Life Expectancy: 15 Years End of Life Options: Take Back Program (Various Locations), Recyclable

### Ingredients:

Coating: Ethylene-Propylene Copolymer, Butadiene Acrylate, Ammonium Lauryl Sulfate, Carbon Black Amorphous, Calcium Carbonate, Limestone, Polypropylene, Tris(2,4-Di-Tert-Butylphenyl) Phosphite, Sodium Polyacrylate Thickner, 2,5-Furandione, Polymer with Ethene and 1-Propene; Primary: Polyethylene Terephthalate, Propylene Homopolymer; Scrim: Filament Glass Fibers, Polyester, Nylon 6, Carbon Black Amorphous; Yarn: Nylon 6, Nylon 6,6, Titanium Dioxide; Topical: 2-Propenoic Acid, 2-Methyl-, Butyl Ester, Polymer with Butyl 2-Propenoate and Methyl 2-Methyl-2-Propenoate, Potassium Lauryl Phosphate, 4,4-Dihydroxydiphenylsulfone-Formaldehyde-p-Phenolsulfonic Acid Copolymer

MHK-0016	EXP. 01 NOV 2018
VOC Content: N/A	VOC Emissions: CDPH Compliant
Declaration Status	LBC Red List Free LBC Compliant Declared

Mohawk Group utilizes multiple platforms for disclosing our transparency information, including Mindful Materials and the Declare Database.\*





\*Transparency documentation can be found at mohawkgroup.com

# EcoFlex Matrix sustainable carpet tile backing

Mohawk Group continues its dedication to sustainable solutions with EcoFlex<sup>™</sup> Matrix, the next generation in carpet tile backing. Using advanced materials and patent pending engineering, EcoFlex Matrix lowers environmental impact without sacrificing performance. EcoFlex Matrix simplifies floor preparation and installation, greatly reduces sub-floor moisture concerns, and is easier to ship and handle.

### PERFORMANCE


- Provides permanent dimensional stability
- Tiles are impervious to moisture damage from spills and water extraction cleaning
- Up to Lifetime Limited Carpet Tile Warranty for: Wear, Static Protection, Edge Raveling/ Zippering, Delamination, Dimensional Stability\*
- Seamless transitions between carpet and hard surface flooring with Mohawk Group's 2.5mm ERT resilient products

### INSTALLATION

- Simplifies complex floor preparation with no need to encapsulate old adhesives\*\*
- Greatly reduces sub-floor moisture concerns and saves money on mitigation
- Worry free installation with no visible moisture present using our Flexlok Tab System
- Superior construction offers reliability for the life of your installation

### SUSTAINABILITY

- EcoFlex Matrix is manufactured using less energy than other carpet tile products
- Polyolefin backing contains no plasticizers
- Contains a minimum of 40% pre-consumer recycled content based on total product weight\*\*\*
- May contribute to or comply with LEEDv4, Living Building Challenge, and WELL Building Standard
- CRI Green Label Plus certified
- Declare Red List Free
- Recyclable through Mohawk's ReCover Program
- Able to ship more per box resulting in a lower environmental impact from transportation

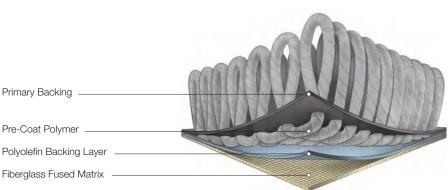

\* Lifetime or 10 Year Limited Warranty varies by fiber type. Please see specifications for details

- \*\*Consult Mohawk Group Installation Instructions for any applicable restrictions
- \*\*\*Recycled content claim third party verified by UL (Underwriters Laboratory)



# Elemental Edges FINISHING ACCESSORIES

At Mohawk Group we believe in providing project solutions that are easy to select and readily available. Elemental Edges is a complete portfolio of freeto-ship accessories for all your flooring installation and finishing needs. The program is offered in 14 QuickShip colors that coordinate perfectly with our full suite of soft and hard surface products.



### Wall Base

Seamlessly coordinate your wall base and Mohawk Group floor covering from our variety of QuickShip wall base offerings.

### AVAILABLE IN

- Rubber
- Vinyl
- 4" or 6" in height
- Coved or straight
- 4' lengths or 96' &
- 120' rolls
- 1/8" gauge
- .080" gauge
  (4" Cove vinyl)



## Installation Accessories

Add a functional finishing touch to your coordinated color scheme with Mohawk Group installation accessories. Proprietary Rubber formulations are shrink and crack-proof, and won't fade, even in direct sunlight.

### CHOOSE FROM

- Universal Transitions
- Adaptors
- ReducersStair Solutions
- Cove Stick



## **Stair Solutions**

Specify 12.5" regular tread or 20" integrated tread/riser, available in 48" and 72" lengths. Round and hammered finishes are available with standard square nose. All profiles are available with or without visually impaired strips.

### CHOOSE FROM

- Stair Treads
- Risers
- Resilient Landing Tiles
- Nosings

## Specifications

Picture This BT334 / QB334 Seek Unique BT335 / QB335 Coolly Noted BT336 / QB336

### DESIGN

Size	24" x 24" (.6096m x .6096m)
Surface Appearance	Textured Patterned Loop
Fiber Type	Colorstrand <sup>®</sup> Nylon
Dye Method	Solution Dyed / Yarn Dyed
Installation Methods	Monolithic / Quarter Turn / Brick Ashlar / Vertical Ashlar / Multi-Directic
Colors Available	5

### PERFORMANCE

Construction Gauge Stain Release Technology Soil Release Technology Backing Material Flammability Smoke Density Static Propensity

### Tufted 1/12" (47.00 rows per 10cm) EcoSentry Plus Stain Protection EcoFlex Matrix ASTM E 648 - Class 1 (Glue Down) ASTM E 662 - Less than 450 AATCC - 134 Under 3.5 KV

### SUSTAINABILITY

Indoor Air Quality NSF 140 Living Product Challenge Petal Certified; Declared, Environmental Product Declaration Green Label Plus #1171 Gold

### SERVICE

Certification

Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Static

### Installation Instructions:



Mohawk Group warrants its adhesives for the life of the original installation only when a Mohawk Group style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk. Group adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

Chair pads are recommended under office chairs with roller casters to preserve appearance retention, act as a deterrent toward delamination and to prevent premature or accelerated wear. Walk-off tiles from the Tuff Stuff II Collection are recommended at entryways to reduce solling. Mohawk Group is providing this architect folder for the purpose of promoting our commercial business. This folder and its samples shall remain the property of Mohawk Group. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations.

### For current and complete specifications please visit www.mohawkgroup.com

recover



vcled materials



Mohawk Group 160 South Industrial Blvd. Calhoun, GA. 30701 1-800-554-6637 mohawkgroup.com

## Mohawk Group

QSMIX 12PG BROCHR LT

## **Picture This**

Collection	Mixology
Style Name	Picture This
Style Number	BT334
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Monolithic, Vertical Ashlar, Brick Ashlar,

Feature	Description
Backing Material	EcoFlex Matrix
Fiber Type	ColorStrand® Nylon
Dye Method	Solution Dyed / Yarn Dyed
Installation Methods	Monolithic, Vertical Ashlar, Brick Ashlar, C
Stitches per Inch	11.5 (45.28 per 10cm)
Density	6059
Tufted Pile Weight	17.00 oz/yd2 (576 g/m2)
Surface Texture	Textured Patterned Loop



## **Recommended Installation Methods**











Brick Ashlar

Monolithic

Multi-Directional

Quarter Turn

Vertical Ashlar

## Colorways



Color code: 7131 BT334 Style number:

Madras



Color code: 7585 Style number: BT334



Mudslide

Color code: Style number:

7878 BT334

**Smoky Martini** Color code: 7968 Style number: BT334



### **Black Velvet**

Sea Breeze

Color code: Style number:

7989 BT334

п	Mo	ha	νk	Gro	ur

# III Mohawk Group

## Performance

Feature	Description
Gauge	1/12 (47.00 rows per 10 cm)
Stain Release Technology	Pass
Foot Traffic Recommendation TARR	Severe
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection

## Sustainability

Feature	Description
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.057 kg CO2e/ft2
Embodied Carbon	1.14 kg CO2e/ft2
Total Recycled Content	44%
Pre-Consumer Recycled Content	44%
NSF 140	EcoFlex Matrix - NSF 140 Gold
Indoor Air Quality	<u>GLP 1171</u>
TVOC Range	0.5 mg/m3 or less
Red List Free	True
Declare Label	Nylon Modular Carpet on EcoFlex Matrix
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	ReCover Program
Health Product Declaration	HPD 2.1 EcoFlex Matrix - 1000 ppm
Environmental Claims Validation	EPD EcoFlex Matrix
Global Green Tag	GreenRate Level A, LCARate Silver Plus
LEED Credit Potential	LEED Eligible

## Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Static

9

## Seek Unique

Collection	Mixology
Style Name	Seek Unique
Style Number	BT335
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Monolithic, Vertical Ashlar, Brick Ashlar,

Feature	Description
Backing Material	EcoFlex Matrix
Fiber Type	ColorStrand® Nylon
Dye Method	Solution Dyed / Yarn Dyed
Installation Methods	Monolithic, Vertical Ashlar, Brick Ashlar, C
Stitches per Inch	11.5 (45.28 per 10cm)
Density	4896
Tufted Pile Weight	17.00 oz/yd2 (576 g/m2)
Surface Texture	Textured Patterned Loop



## **Recommended Installation Methods**











Brick Ashlar

Monolithic

BT335

Multi-Directional

Quarter Turn

Vertical Ashlar

### Colorways



Color code: 7131 BT335 Style number:

Madras







Mudslide

Color code: Style number:

7878 BT335 **2**Interdeco



**Smoky Martini** Color code: 7968

Style number:



### **Black Velvet**

Color code: Style number:

7989 BT335

## Performance

Feature	Description
Gauge	1/12 (47.00 rows per 10 cm)
Foot Traffic Recommendation TARR	Heavy
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection

## Sustainability

Feature	Description
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.057 kg CO2e/ft2
Embodied Carbon	1.14 kg CO2e/ft2
Total Recycled Content	44%
Pre-Consumer Recycled Content	44%
NSF 140	EcoFlex Matrix - NSF 140 Gold
Indoor Air Quality	GLP 1098
TVOC Range	0.5 mg/m3 or less
Red List Free	True
Declare Label	Nylon Modular Carpet on EcoFlex Matrix
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	ReCover Program
Health Product Declaration	HPD 2.1 EcoFlex Matrix - 1000 ppm
Environmental Claims Validation	EPD EcoFlex Matrix
LEED Credit Potential	LEED Eligible

## Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Static

in

## **Coolly Noted**

Collection	Mixology
Style Name	Coolly Noted
Style Number	BT336
Product Type	Carpet Tile
Size	24" X 24"
Construction	Tufted
Installation	Monolithic, Vertical Ashlar, Brick Ashlar,

Feature	Description
Backing Material	EcoFlex Matrix
Fiber Type	ColorStrand® Nylon
Dye Method	Solution Dyed / Yarn Dyed
Installation Methods	Monolithic, Vertical Ashlar, Brick Ashlar, C
Stitches per Inch	11.6 (45.67 per 10cm)
Density	7200
Tufted Pile Weight	17.00 oz/yd2 (576 g/m2)
Surface Texture	Textured Patterned Loop



## **Recommended Installation Methods**



Brick Ashlar



Monolithic



Multi-Directional





Quarter Turn

Vertical Ashlar

### Colorways



Color code: 7131 BT336 Style number:

Madras



Color code: 7585 Style number: BT336



Mudslide

Color code: Style number:

7878 BT336



**Smoky Martini** Color code: 7968

BT336

Style number:



### **Black Velvet**

Sea Breeze

Color code: Style number:

7989 BT336 **Z**Interdeco

## Performance

Feature	Description
Gauge	1/12 (47.00 rows per 10 cm)
Foot Traffic Recommendation TARR	Heavy
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection

## Sustainability

Feature	Description
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.057 kg CO2e/ft2
Embodied Carbon	1.14 kg CO2e/ft2
Total Recycled Content	44%
Pre-Consumer Recycled Content	44%
NSF 140	EcoFlex Matrix - NSF 140 Gold
Indoor Air Quality	GLP 1098
TVOC Range	0.5 mg/m3 or less
Red List Free	True
Declare Label	Nylon Modular Carpet on EcoFlex Matrix
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	ReCover Program
Health Product Declaration	HPD 2.1 EcoFlex Matrix - 1000 ppm
Environmental Claims Validation	EPD EcoFlex Matrix
Global Green Tag	GreenRate Level A, LCARate Silver Plus
LEED Credit Potential	LEED Eligible

## Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Static

in

Mohawk Group